

## Features


- \* 2 channel mixer of 10 inputs
- \* Remote paging console T-319 as mic 1 with highest input priority
- \* Mic 2-4 with VOX selector over inputs 5-10 and phantom power
- \* All the 10 inputs with mic, line and high pass filtering selector
- \* Inputs 6-10 either by XLR mic inputs or by dual RCA line inputs
- \* Dual channel XLR line outputs
- \* All inputs include inputs 1-10, PTT1 (remote paging console T-319), chime could be selected to have channel 1, channel 2 and channel 1+2 outputs.
- \* Built-in 2/4 tone pre-set chime, remote chime trigger and local trigger on front panel
- \* Volume controls are provided over chime, PTT1, inputs 2-10, channel 1 and channel 2 masters. Bass and treble tone control are provided for both channel 1 and channel 2.
- \* Indicators for input 1-10, power and 2 channel level meters
- \* AC 110 or 230V and DC 24V operation

## Specifications

Model	T-2S01
Input Sensitivity/Impedance	
MIC/ Line	-50dBu(2.45mV)/5K $\Omega$ balanced; -10cBu(245mV)/5K $\Omega$ balanced
Line RCA In	-10dBu(245mV)/5K $\Omega$ unbalanced
Output Level/Impedance	
Master 1, 2	Nor +4dBu/200 $\Omega$ balanced
REC	Nor 0dBu/10K $\Omega$ unbalanced
Frequency Response	
Less Than	-0.5dB(20Hz~20KHz)
S/N Ratio	
MIC	More than 60dB
Line	More than 75dB
THD	
MIC	Less than 0.05%
Line	More than 0.03%
Cross-talk	
MIC	More than 60dB
Line	More than 75dB
Power Consumption Power	13W
Power Supply	~110V/60Hz or ~230V/50Hz & DC 24V
Dimensions(WxHxD)	484x44x265mm
Weight	3.9Kg



## Rear Panel

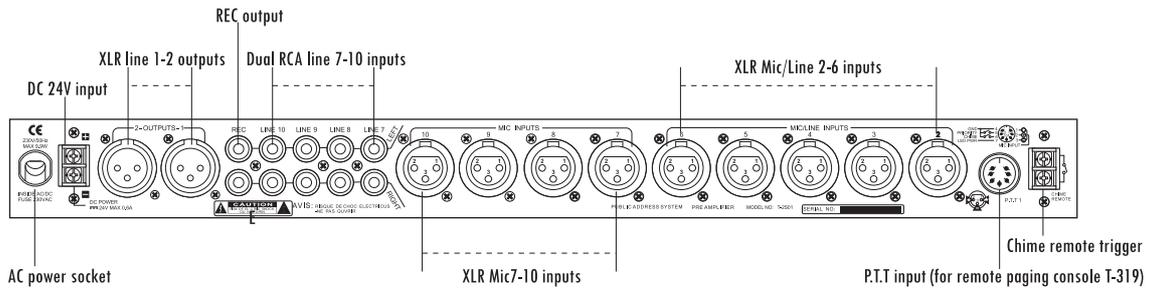

## Connections

