

120W SD Timer 100V


### Features

- \* Mixer amplifier built-in MP3 and weekly timer
- \* Amplifier power output 120W
- \* Rack mount type in 2U height
- \* MP3 input by SD card in front panel
- \* 1 Mic input by Combo type
- \* 2 aux inputs by RCA type
- \* Balanced line output
- \* Speaker output: 70V, 100V and 4-16ohms
- \* Mic1 input with priority over other inputs, and mute level control is supplied
- \* Bass/treble tone control and volume control for MP3, Mic, Aux1-2 and master volume control
- \* Play, all play, circle, repeat, random play modes
- \* Weekly program over time, sound selection & play mode
- \* 4 master programs and 1 spare program
- \* 0 to 9 ten sound number direct selection buttons
- \* MP3, swift, up, down, left, right and ok functional buttons
- \* 5 level output indicator, protection and power indicator

### Specifications

Model	MPT120
Power Output(THD 1%)	120W
Speaker Outputs	70V, 100V & 4~16Ω
MIC Input Sensitivity/Impedance	5mV/600Ω
AUX 1-2 Input Sensitivity/Impedance	350mV/10KΩ
S/N Ratio	≥ 76dB
Frequency Response	50Hz~18KHz(+3dB)
Tone (Bass: 100KHz, Treble: 10KHz)	+10dB
Pre Output	1V/600Ω
THD	≤ 0.5%
MP3	Support MP3 format, max capacity of 2TB
Chime Activation	Short circuit dry contact
Program Steps	Total 512 Steps, 1 day ≤ 200 Steps
Communication Protocols	RS422
Communication Port	RJ45
Communication Speed	4800bps
Time Mode	24 hours(hour-minutes-seconds) weekly
Power Supply	~110V/60Hz or ~230V/50Hz
Power Consumption	180W
Dimensions	430×358×88mm
Weight	10.2Kg

Rear Panel

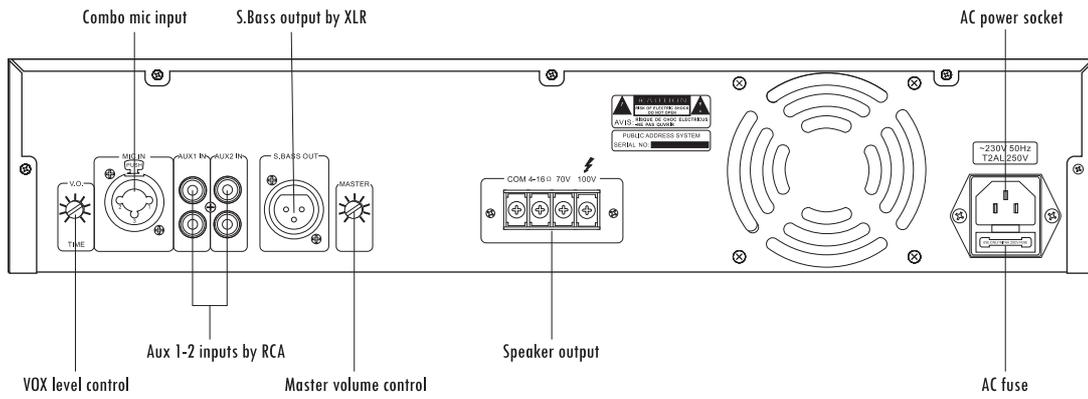

Connections

